

Measurement of the transverse spatial quantum state of light at the single-photon level

Brian J. Smith, Bryan Killett, and M. G. Raymer

Oregon Center for Optics and Department of Physics, University of Oregon, Eugene, Oregon 97403

I. A. Walmsley

Clarendon Laboratory, University of Oxford, Parks Road, Oxford OX1 3PU, UK

K. Banaszek

Institute of Physics, Nicolaus Copernicus University, Grudziadzka 5, PL-87-100 Torun, Poland

Received July 14, 2005; accepted August 23, 2005

We present an experimental method to measure the transverse spatial quantum state of an optical field in coordinate space at the single-photon level. The continuous-variable measurements are made with a photon-counting, parity-inverting Sagnac interferometer based on all-reflecting optics. The technique provides a large numerical aperture without distorting the shape of the wavefront, does not introduce astigmatism, and allows for characterization of fully or partially coherent optical fields at the single-photon level. Measurements of the transverse spatial Wigner functions for highly attenuated coherent beams are presented and compared with theoretical predictions. © 2005 Optical Society of America

OCIS codes: 030.1640, 110.1650, 270.1670.

Individual light quanta, or photons, have a wealth of structure that has yet to be fully explored and utilized. Frequently photons are used to carry information. Indeed, single photons are the basis of communications systems whose security is guaranteed by quantum mechanics. The most common coding is as “qubits,” in which logical “0” and “1” are represented by two orthogonal polarization states, which form a discrete degree of freedom of the photonic quantum state. Currently, spatial degrees of freedom of single photons are being studied as a means to encode information,^{1,2} and thus a full characterization of arbitrary, continuous spatial states of photons is important. Furthermore, measurement of the spatial state of single photons puts the concept of the photon wave function^{3,4} on solid ground. The state of photon polarization, which is a discrete degree of freedom, has been treated previously.⁵

In this Letter we demonstrate a technique, shown in Fig. 1, for measuring the continuous-variable, transverse spatial state of an optical field at the single-photon level. This technique directly measures the transverse spatial Wigner function (WF) of a light field by using a common-path (Sagnac) interferometer and an area-integrating detector.⁶ Measurement of the transverse spatial WF for an ensemble of identically prepared photons completely characterizes the transverse spatial state of this ensemble. The WF for a single-photon source is equivalent to the density matrix describing the quantum state, for either pure or mixed states. For pure states, the complex electric field, $E(\mathbf{x})$, up to a normalization constant, equals the photon wave function in coordinate space.^{3,4}

A key feature of the method is that every run generates a datum: it is not necessary to filter the input light and thus discard photons. This requires the use of a detector that itself does not spatially or angu-

larly filter the light and is sensitive to single photons. In Ref. 6 (hereafter referred to as MBWD) the design of the interferometer restricted the range of the transverse wave vector and the spatial extent of the input photonic quantum state, because the interferometer optics and proposed small-area detector, an avalanche photodiode, limited the field stop and entrance pupil sizes.

The method that we use to measure the photon's continuous-variable state is a generalization of that proposed in MBWD, with one crucial difference and

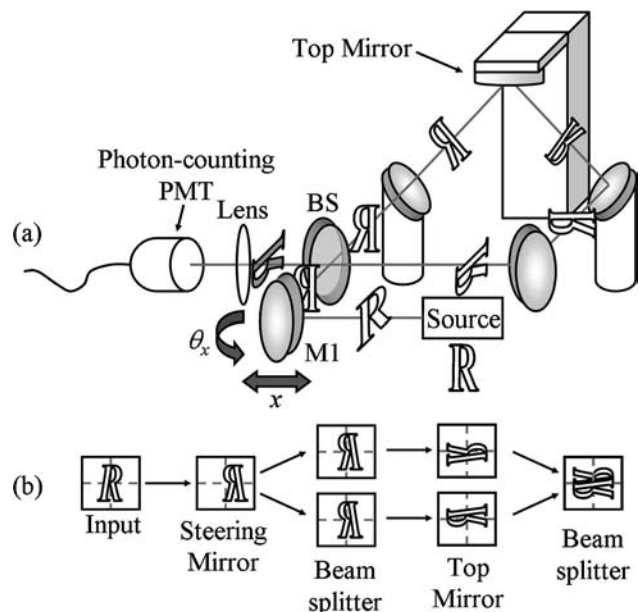


Fig. 1. (a) Experimental apparatus showing the top-mirror and wavefront rotation. Only the wavefront transformations along the clockwise path are depicted. The external steering mirror M1 tilts (θ_x) and translates (x). (b) Wavefront transformations after optical elements of the interferometer.

other substantive improvements. The improved scheme, shown in Fig. 1, employs an all-reflecting, parity-inverting Sagnac interferometer and a large-area photon-counting photomultiplier tube (PMT), allowing the emerging beams to be detected at the single-photon level. Light from the source is directed by an external steering mirror, M1, into the interferometer. The field is split by a 50:50 beam splitter into clockwise and counterclockwise propagating beams. As the two beams pass through the interferometer, they are directed out of the plane of the table by three mirrors, in what we call a top-mirror configuration, which replaces the Dove prism used in MBWD. A Dove prism inherently introduces astigmatism into the wavefronts and can lead to measurement errors. Furthermore, the ability of the interferometer to collect divergent light, measured by the device's numerical aperture ($NA \approx 0.01$ for MBWD), would be severely limited by the cross section of a Dove prism. A low NA not only limits the amount of light collected but also lowers the diffraction-limited spatial resolution. Elimination of the Dove prism removes astigmatism and increases the NA of the device to an observed value of 0.09, and potentially as high as 0.3.

The angles between all beam propagation directions in the interferometer are 90° . This arrangement rotates transverse the field distributions of the two beams by $\pm 90^\circ$ for the counterclockwise and clockwise directions, respectively, and inverts them along the horizontal, giving the transformations $E(x, y) \rightarrow E(\pm y, \pm x)$. The opposition of the rotations is due to the direction of propagation through the apparatus and can be understood by using a Berry's phase argument.⁷ This effectively performs a two-dimensional parity operation on one of the wavefronts while leaving the other unchanged. (The optical polarizations are modified only slightly.) At the output the beams are then recombined at the beam splitter and collected with a lens onto a large-area, photon-counting PMT. The average count rate from the PMT is proportional to a constant term plus a term proportional to the WF at a point in phase-space that is set by the tilt and translation of the steering mirror.⁶ The need for a large-area detector arises inherently from the intrinsic divergence of the signal field and the need to scan the tilt and location of the external mirror. This breaks the beam emerging from the Sagnac into two distinct beams that cannot be imaged to a single small-area detector such as an avalanche photodiode.

That the parity-inverting Sagnac interferometer measures the WF can be seen by expressing the WF of a state $\hat{\rho}$ as the expectation value of the parity operator $\hat{\Pi}$, evaluated with a state that has been displaced in phase space by a transverse distance \mathbf{x} and transverse wave vector \mathbf{k} ,

$$W(\mathbf{x}, \mathbf{k}) = \frac{1}{\pi^2} \text{Tr}[\hat{D}^{-1}(\mathbf{x}, \mathbf{k}) \hat{\rho} \hat{D}(\mathbf{x}, \mathbf{k}) \hat{\Pi}], \quad (1)$$

where $\hat{D}(\mathbf{x}, \mathbf{k})$ is the phase-space displacement operator.⁸ For a complex quasi-monochromatic scalar

field, $E(\mathbf{x})$, the transverse spatial WF equals

$$W(\mathbf{x}, \mathbf{k}) = \frac{1}{\pi^2} \int d^2x' \langle E(\mathbf{x} + \mathbf{x}') E^*(\mathbf{x} - \mathbf{x}') \rangle \exp(2i\mathbf{k} \cdot \mathbf{x}'), \quad (2)$$

where $\mathbf{x}' = (x', y')$ is the two-dimensional vector in the object plane, $\mathbf{k} = (k_x, k_y)$ is the transverse-spatial wave vector, and the angle brackets imply an ensemble average over all statistical realizations of the field. For a single-photon field, $\langle E(\mathbf{x}_1) E^*(\mathbf{x}_2) \rangle$ is the density matrix and represents the quantum state of the photon.

As pointed out by MBWD, the average count rate from the PMT is proportional to three terms: $\langle N \rangle = \langle n_1 \rangle + \langle n_2 \rangle + \langle n_{12} \rangle$. The first two terms are proportional to the intensities of the individual counter-propagating beams, which are independent of the position and tilt of the steering mirror, M1. The final term is proportional to the transverse spatial WF, with arguments determined by the position $\mathbf{x} = (x, y)$ and tilt angles $\theta_i = \arcsin(k_i/k_0)$ of the steering mirror, M1 (subscript $i = x$ or y , and k_0 is the wavenumber),

$$\langle n_{12} \rangle = -\eta(\pi^2/2)W(\mathbf{x}, \mathbf{k}). \quad (3)$$

Here η is related to the detector's efficiency, and the negative is due to the reflection phase shift from the beam splitter.

A Fresnel diffraction calculation shows that the measured WF describes the spatial state of the field at the plane in which the beams are tilted, that is, in the plane of the steering mirror, M1. This observation corrects a statement in MBWD.

The interferometer was constructed with 51 mm diameter dielectric mirrors and a 51 mm diameter nonpolarizing beam splitter. The steering mirror, M1, was mounted on translation and rotation stages. The light at the output of the interferometer was collected by using a 51 mm diameter lens, of 75 mm focal length, onto the large-area, photon-counting PMT module (Hamamatsu H7422-50) with a quantum efficiency of approximately 11% at 633 nm and spatial uniformity $> 85\%$. A computer controlled the steering mirror position via two actuators and collected the average photon count rate at each position.

To demonstrate the ability of this interferometer to measure transverse spatial WFs at the single-photon level, we examined several fields derived from a highly attenuated He-Ne laser. For simplicity, only one-dimensional fields are considered, that is, fields that vary in only one transverse spatial dimension, x . This can be accomplished by using fields that can be factored into functions that depend on orthogonal coordinates (x, y) .

Measured transverse spatial WFs are shown in Fig. 2. These were obtained by using fields attenuated such that there was less than a single photon present in the interferometer on average. The photon-counting rate was typically centered at about 100,000 counts/s. The first plot, Fig. 2(a), depicts the transverse spatial WF for a top-hat field distribution. This field was created by directing an expanded laser

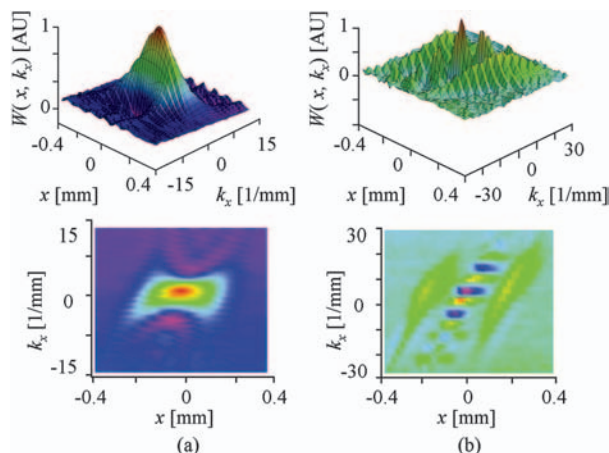


Fig. 2. Single-photon level transverse spatial WF measurements for (a) the top-hat field distribution and (b) the double-slit field distribution.

beam onto a single slit (width=0.40 mm) placed just before the steering mirror. The triangular peak along the $k_x=0$ section represents the autocorrelation of the top-hat function, and the large values of k_x near the edges correspond to diffraction from the edges of the slit. The second plot, Fig. 2(b), depicts the transverse spatial WF of two top-hat fields displaced transversely from one another. This field was created by passing an expanded laser beam through a double slit (spacing=0.28 mm and width=0.06 mm) placed just before the steering mirror. The plot shows two lobes displaced along the x axis by an amount equal to the slit spacing (0.28 mm) and an oscillating region between, which is a signature of the mutual coherence of the two top-hat fields. The measured slit width of the top-hat field matches the actual slit width (0.40 mm), and the divergence angle given by $k_{x\text{-max}}/k_0$ matches the predicted value of 1.51 mrad. Similarly the measurement of the slit widths (0.06 mm), double-slit spacing (0.28 mm), and divergence angles for each slit (6.0 mrad) match the actual data as well. The plots are constructed from the raw data by subtracting the constant terms, multiplying by the negative one, and numerically normalizing.

Beyond characterization of single-photon fields, spatially entangled pairs of photons, such as those produced through spontaneous parametric downconversion, contain an abundance of quantum information. Such a system exhibits continuous-variable entanglement (position and momentum), analogous to the quadratures of a single-mode field. With such quantum objects one can realize a form of the original Einstein–Podolsky–Rosen type of continuous-variable entanglement. Such entangled photon pairs are the basis of several novel experiments such as tests of quantum nonlocality,⁹ quantum imaging,¹⁰ and quantum lithography.¹¹

By sending two spatially entangled photons into two parity-inverting interferometers, one can measure the joint two-photon transverse spatial WF and completely characterize the transverse entanglement

of this system.⁶ With this technique, entanglement can be fully characterized. Furthermore, the study of the spatial decoherence of classical waves passing through a random scattering medium¹² can then be extended to the quantum realm by observing photon disentanglement. Understanding such disentanglement is not only of fundamental interest but plays a key role in the efficient application of photons as quantum information carriers.

In conclusion, we present the first measurements to our knowledge of the continuous-variable transverse spatial state of light at the single-photon level. The scheme developed is particularly geared toward measurement of single photons, including those scattered in random media. This technique adds to and improves on the previous methods of optical field measurement. The phase-space tomography¹³ and two-point correlation function approaches,^{12,14,15} for example, were limited to fields of at least a few photons. The new technique should be of use for characterizing extremely low-intensity light fields and should serve as a probe for spatial decoherence and entanglement in optical systems.

The authors thank Andrew Nahlik for helpful contributions. This research was supported by the National Science Foundation's Information Technology Research for National Priorities and Doctoral Dissertation Enhancement Projects programs, grants 0219460 and 0334590. Brian J. Smith's e-mail address is bsmith4@uoregon.edu.

References

1. H. Sasada and M. Okamoto, *Phys. Rev. A* **68**, 012323 (2003).
2. N. K. Langford, R. B. Dalton, M. D. Harvey, J. L. O'Brien, G. J. Pryde, A. Gilchrist, S. D. Bartlett, and A. G. White, *Phys. Rev. Lett.* **93**, 053601 (2004).
3. I. Bialynicki-Birula, in *Progress in Optics XXXVI*, E. Wolf, ed. (Elsevier, 1996), pp. 245–294.
4. J. E. Sipe, *Phys. Rev. A* **52**, 1875 (1995).
5. A. G. White, D. F. V. James, P. H. Eberhard, and P. G. Kwiat, *Phys. Rev. Lett.* **83**, 3103 (1999).
6. E. Mukamel, K. Banaszek, I. A. Walmsley, and C. Dorrer, *Opt. Lett.* **28**, 1317 (2003).
7. E. J. Galvez and C. D. Holmes, *J. Opt. Soc. Am. A* **16**, 1981 (1999).
8. A. Royer, *Phys. Rev. A* **15**, 449 (1977).
9. J. C. Howell, R. S. Bennink, S. J. Bentley, and R. W. Boyd, *Phys. Rev. Lett.* **92**, 210403 (2004).
10. T. B. Pittman, Y. H. Shih, D. V. Strekalov, and A. V. Sergienko, *Phys. Rev. A* **52**, R3429 (1995).
11. A. N. Boto, P. Kok, D. S. Abrams, S. L. Braunstein, C. P. Williams, and J. P. Dowling, *Phys. Rev. Lett.* **85**, 2733 (2000).
12. C.-C. Cheng and M. G. Raymer, *Phys. Rev. Lett.* **82**, 4807 (1999).
13. M. G. Raymer, M. Beck, and D. F. McAlister, *Phys. Rev. Lett.* **72**, 1137 (1994).
14. C. Iaconis and I. A. Walmsley, *Opt. Lett.* **21**, 1783 (1996).
15. C. Dorrer and I. A. Walmsley, *Opt. Lett.* **27**, 1613 (2002).